


RAMANUJ POWER CONTROLS (P) LTD.
Noida - Delhi

EPOXY INSULATORS & BUSHINGS

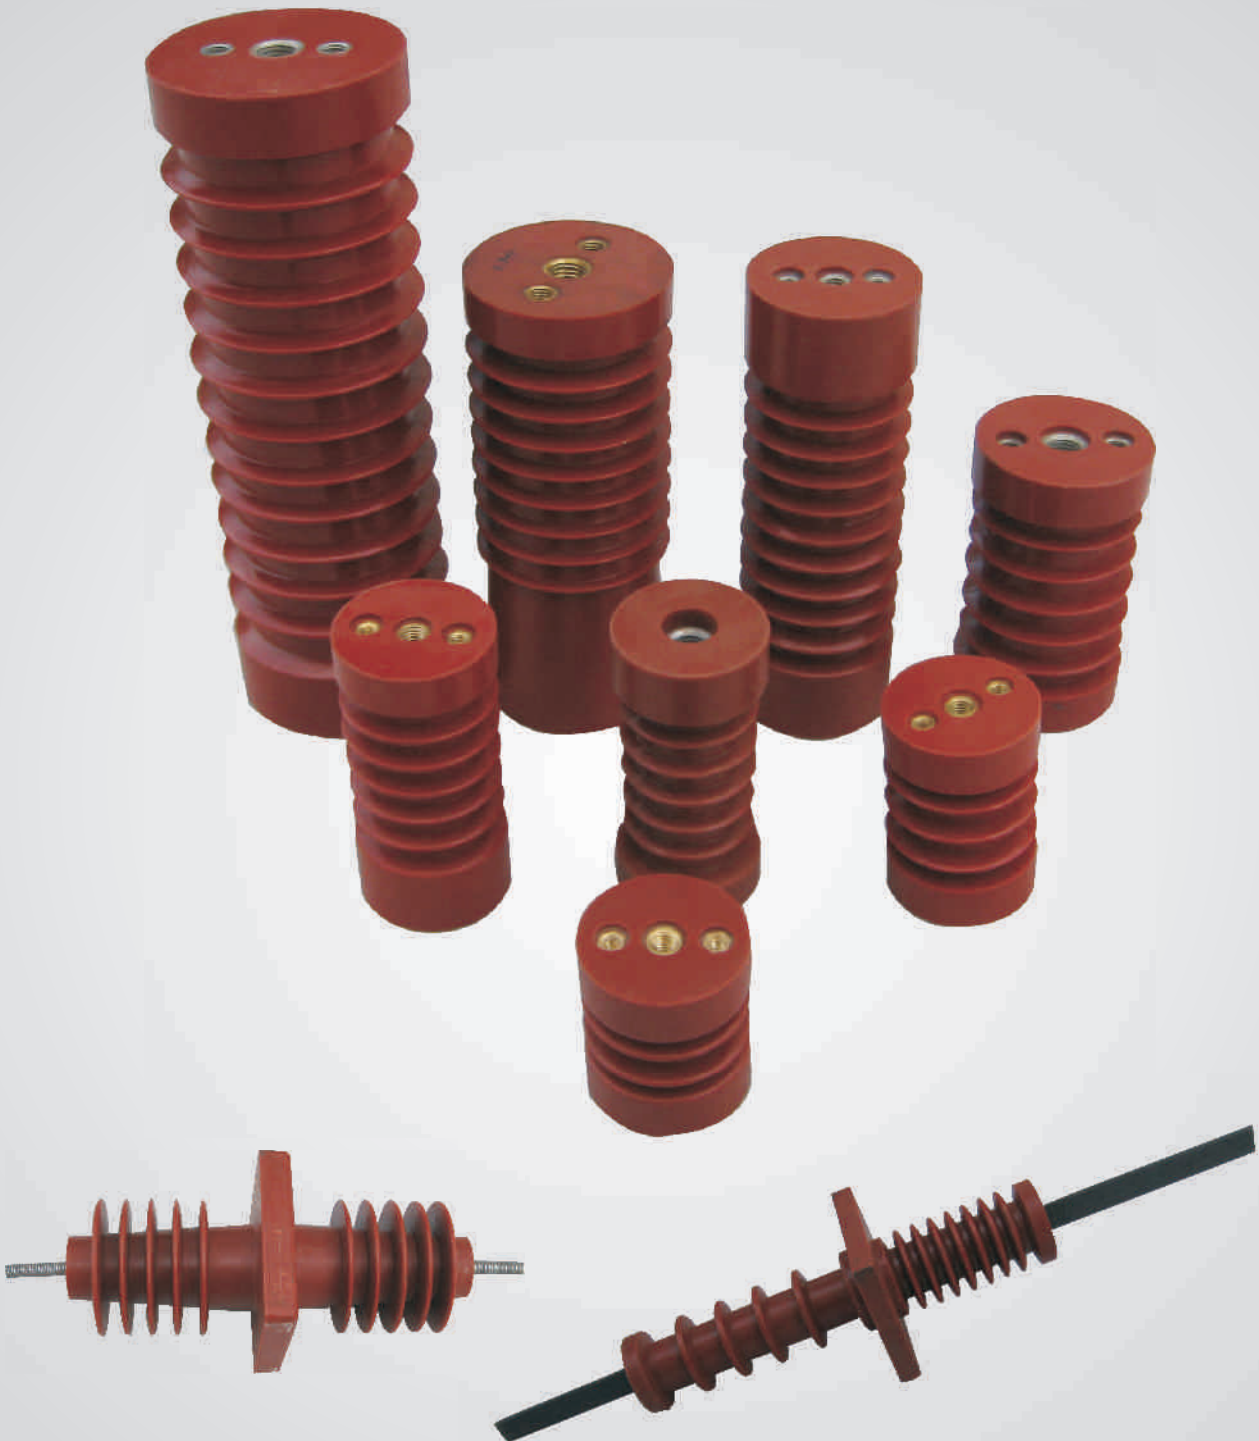

RAMANUJ POWER CONTROLS (P) LTD. / RAMANUJ INDUSTRIES 1787, Bhagirath Palace, Chandni Chowk, Delhi-110006 (India)
Ph : +91-11-23873043, 23865660 Tele-fax : +91-11-23873044 E-mail : sales@ramanujindustries.com Website : www.ramanujindustries.com

EPOXY INSULATORS RATED VOLTAGE 11 KV



CAT No. : HT 11/75130

<u>SPECIFICATIONS</u>	
Dry Power Frequency with Stand Voltage (1 Min.)	35 KV
Impulse withstand Voltage	75 KVP
Creepage Distance	190 mm



CAT No. : HT 11/61130



CAT No. : HT 11/61130S

<u>SPECIFICATIONS</u>	
Dry Power Frequency with Stand Voltage (1 Min.)	35 KV
Impulse withstand Voltage	75 KVP
Creepage Distance	175 mm

EPOXY INSULATORS RATED VOLTAGE 22 KV



CAT No. : HT 22/70210

<u>SPECIFICATIONS</u>	
Dry Power Frequency with Stand Voltage (1 Min.)	50 KV
Impulse withstand Voltage	125 KVP
Creepage Distance	310 mm



CAT No. : HT 22/85210

<u>SPECIFICATIONS</u>	
Dry Power Frequency with Stand Voltage (1 Min.)	50 KV
Impulse withstand Voltage	125 KVP
Creepage Distance	290 mm

EPOXY INSULATORS RATED VOLTAGE 33 KV



CAT No. : HT 33/100300

SPECIFICATIONS

Dry Power Frequency with Stand Voltage (1 Min.)	75 KV
Impulse withstand Voltage	175 KVP
Creepage Distance	410 mm



CAT No. : HT 33/80300

SPECIFICATIONS

Dry Power Frequency with Stand Voltage (1 Min.)	70 KV
Impulse withstand Voltage	170 KVP
Creepage Distance	430 mm

INSULATORS FOR LOWER RATED VOLTAGE



CAT No. : HT 3.3/6175

SPECIFICATIONS

Rated Voltage	3.3 KV
Dry Power Frequency with Stand Voltage (1 Min.)	25 KV
Impulse withstand Voltage	45 KVP
Creepage Distance	100 mm



CAT No. : HT 6.6/6190

SPECIFICATIONS


Rated Voltage	6.6 KV
Dry Power Frequency with Stand Voltage (1 Min.)	27 KV
Impulse withstand Voltage	60 KVP
Creepage Distance	130 mm

EPOXY BUSHINGS FOR TRANSFORMERS / PANELS MOULDED WITH BRASS ROD, COPPER ROD & COPPER FLAT




Copper Flat Size : 25 mm x 6 mm
For Metering Cubical Panels

<u>SPECIFICATIONS</u>	
Rated Voltage	11 KV
Creepage Distance	310 mm

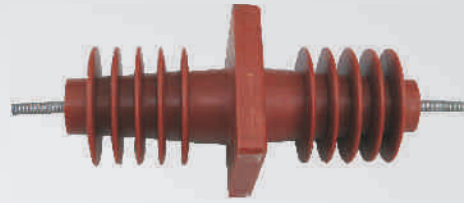


Copper Rod Dia options
available : 12mm, 16mm, 24mm & 30mm

<u>SPECIFICATIONS</u>	
Rated Voltage	11 KV
Dry Power Frequency with Stand Voltage (1 Min.)	12 KV
Impulse withstand Voltage	75 KVP
Creepage Distance	360 mm

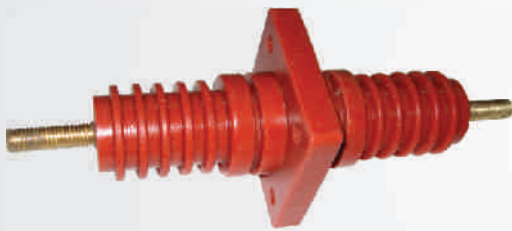

HV Bushing (with 12mm brass rod)
for metering cubicals

<u>SPECIFICATIONS</u>	
Rated Voltage	11 KV
Dry Power Frequency with Stand Voltage (1 Min.)	35 KV
Creepage Distance	170 mm

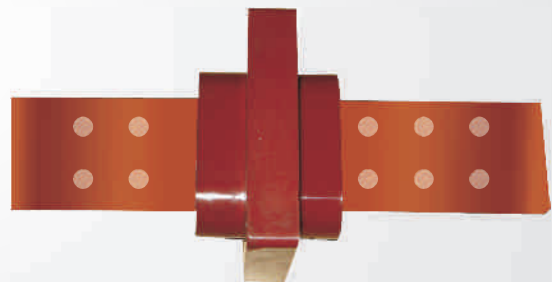

LV Bushing with Copper Flat moulded
Options for flat sizes available for use upto 3150 Amps

<u>SPECIFICATIONS</u>	
Rated Voltage	1.1 KV
Dry Power Frequency with Stand Voltage (1 Min.)	5 KV

Please contact for detailed dimensional drawings and electrical and mechanical test values.

RAMANUJ POWER CONTROLS (P) LTD.
Noida | Delhi

City contact for marketing :

RAMANUJ INDUSTRIES

1787, Bhagirath Palace, Chandni Chowk, Delhi-110006 (India)

Ph : +91-11-23873043, 23865660 Tele-fax : +91-11-23873044

E-mail : sales@ramanujindustries.com Website : www.ramanujindustries.com